

1 UPS 32-80 180



: 95906442

, PES/PP.

1-

: -25 .. 110 °C  
 20 °C  
 998.2 / 3

TF

110  
 : AAA

EN-JL1030  
 ASTM 30 B  
 , PES/PP

.T : - 80 0C: 40 °C

10  
 G 2  
 PN 10  
 180

C : - : 4



1: 135  
2: 200  
3: 220

: 50 Hz  
: 1 x 230 V  
1: 0.6 A  
2: 0.9 A  
3: 0.98 A




: 4  
(IEC 34-5): X4D  
(IEC 85): F

: 4.6  
: 5  
: 0.008 3



## 95906442 UPS 32-80 180 50

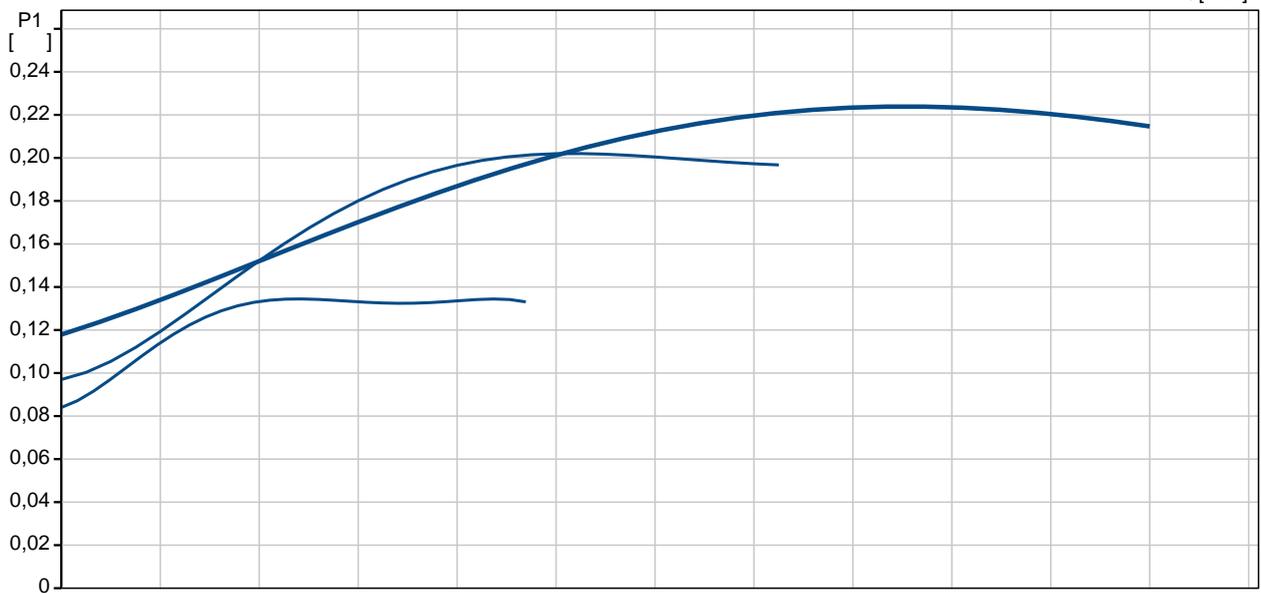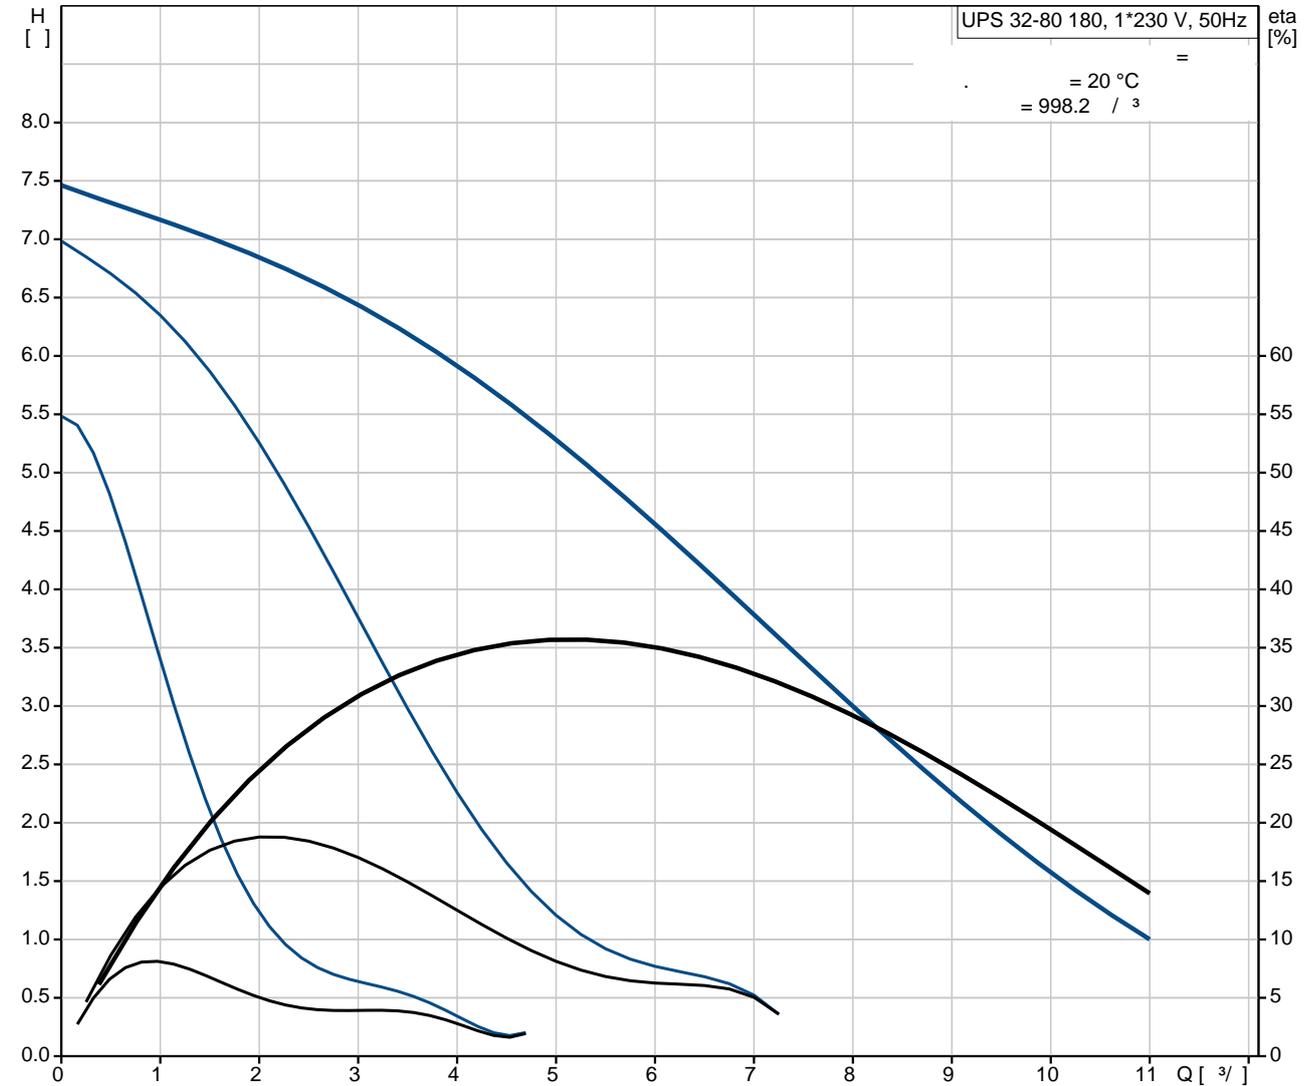


		UPS 32-80 180
		95906442
EAN		5700310346625
		3
		80
TF		110
		AAA
		EN-JL1030
		ASTM 30 B
		, PES/PP
		40 °C
80 OC:		10
		G 2
		PN 10
		180
		-25 .. 110 °C
		20 °C
		998.2 / ³
C		4
		1: 135
		2: 200
		3: 220
		50 Hz
		1 x 230 V
		1: 0.6 A
		2: 0.9 A
		3: 0.98 A
		4
(IEC 34-5):		X4D
(IEC 85):		F
		Contact
		9H
		4.6
		5
		0.008 3

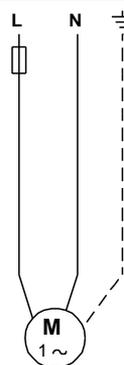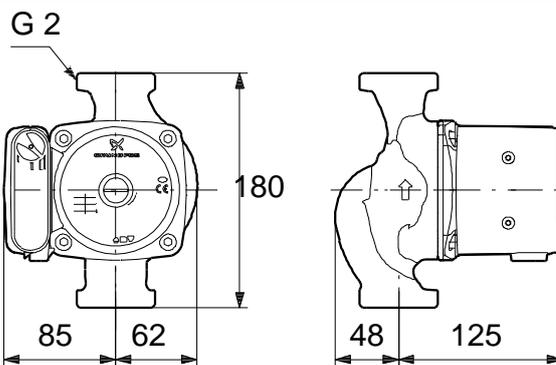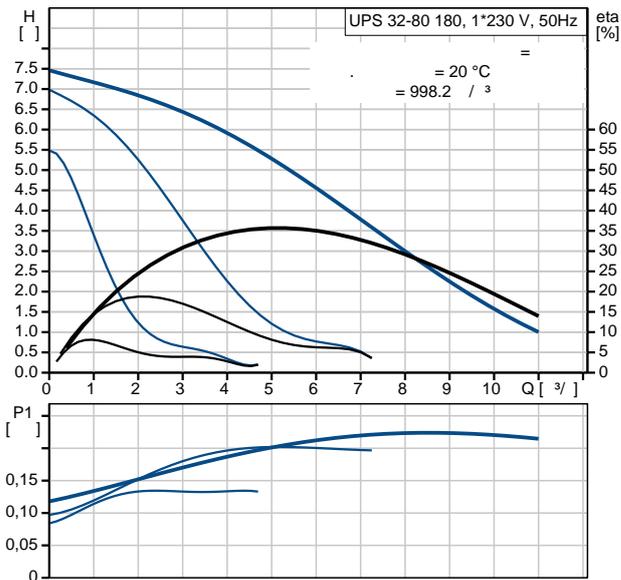

95906442 UPS 32-80 180 50

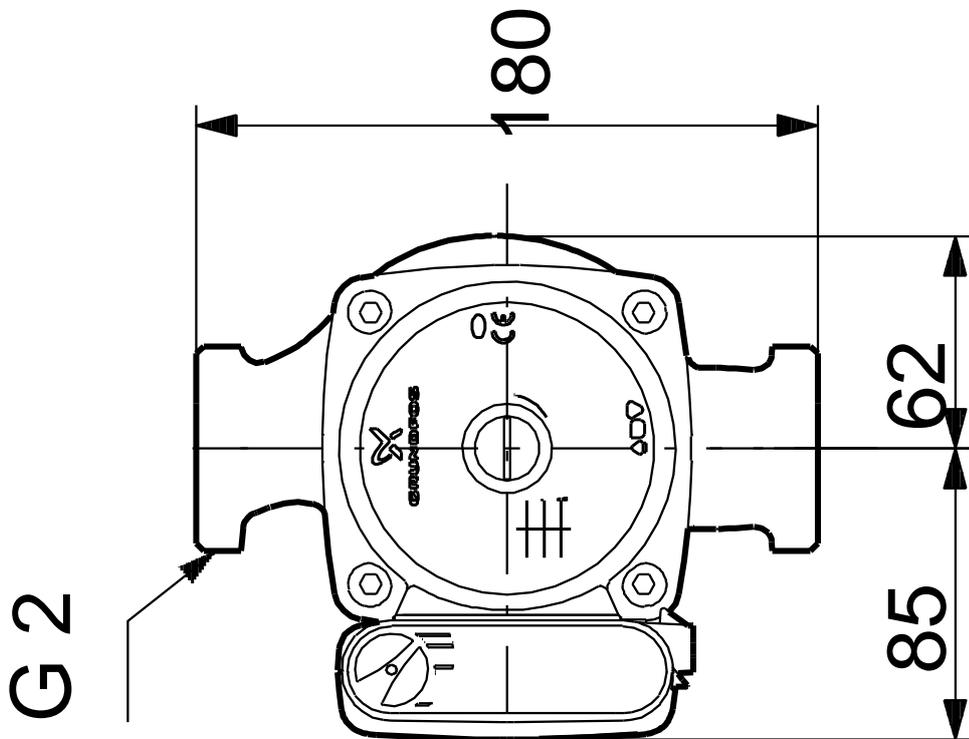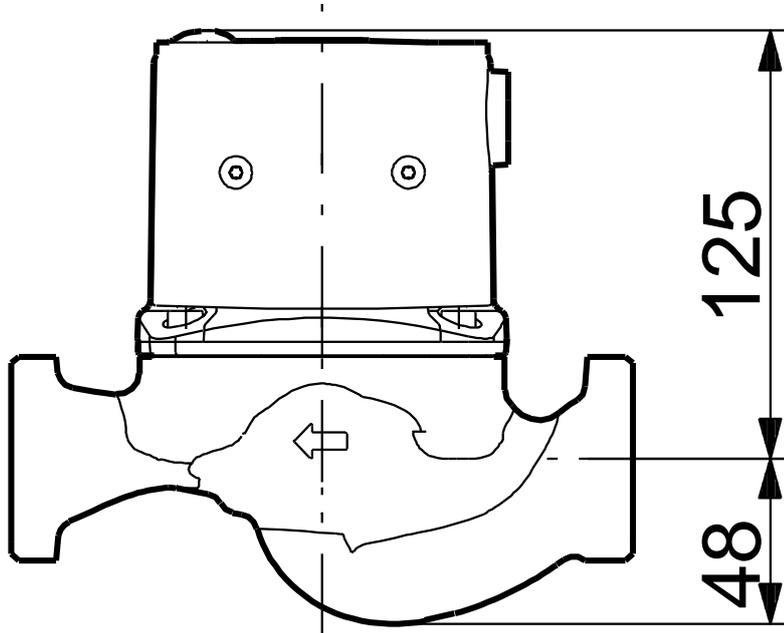

95906442 UPS 32-80 180 50

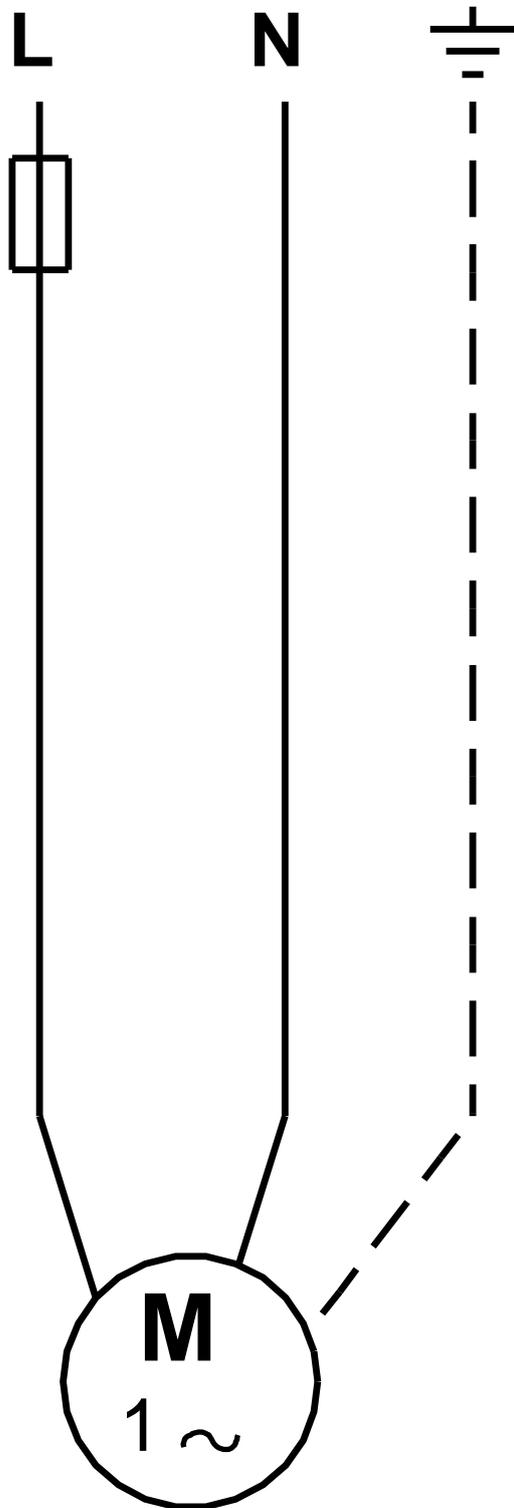

! [ ]